

## PS-12330 12 Volt 33.0 AH

### Rechargeable Sealed Lead Acid Battery



**We've Got The Power.™**




#### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Integrated ABS carrying handles for ease of movement
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

#### Terminals: (mm)


- NB3: Heavy duty terminal posts with nut and bolt fasteners



Torque: 3.9~5.4 Nxm

This model can be supplied with T6 button terminals, subject to inventory availability and lead in times.

#### Physical Dimensions: in (mm)

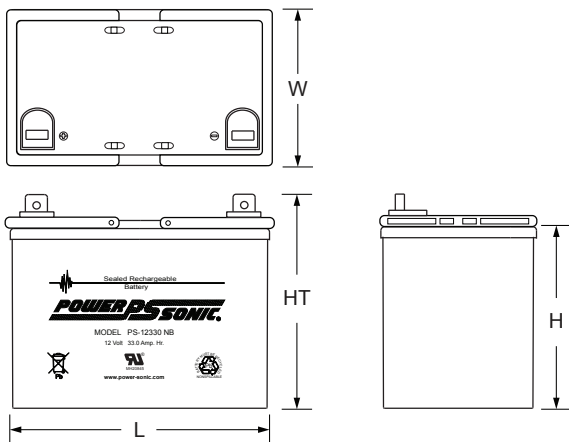

L: 7.72 (196) W: 5.14 (131) H: 6.22 (158) HT: 7.00 (176)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

#### Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

#### Nominal Capacity

20-hr. (1.65A to 10.50 volts) .....	33.0 AH
10-hr. (3.0A to 10.50 volts) .....	30.0 AH
5-hr. (5.2A to 10.20 volts) .....	26.0 AH
1-hr. (19.8A to 9.00 volts) .....	19.8 AH
15-min. (70A to 9.00 volts) .....	16.0 AH

**Approximate Weight** ..... 23.10 lbs. (10.5 kg)

**Energy Density (20-hr. rate)** ..... 1.60 W-h/in<sup>3</sup> (97.91 W-h/l)

**Specific Energy (20-hr. rate)** ..... 17.14 W-h/lb (37.79 W-h/kg)

**Internal Resistance (approx.)** ..... 10 milliohms

**Max Discharge Current (7 Min.)** ..... 99.0 amperes

**Max Short-Duration Discharge Current (7 Sec.)** ..... 330.0 amperes

#### Shelf Life (% of nominal capacity at 68°F (20°C))

1 Month .....	97%
3 Months .....	91%
6 Months .....	83%

#### Operating Temperature Range


Charge ..... -4°F (-20°C) to 122°F (50°C)

Discharge ..... -40°F (-40°C) to 140°F (60°C)


**Case**..... ABS Plastic

**Power-Sonic Chargers** .....PSC-124000A, 124000A-C


**Shelf Life & Storage**

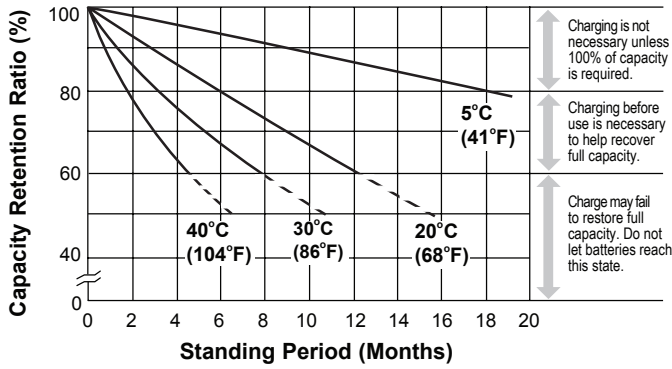


**Discharge Characteristics**

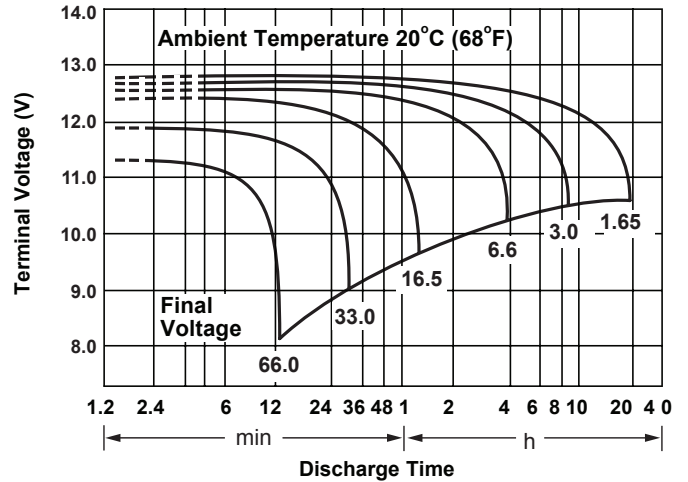


**Discharge Time vs. Discharge Current**

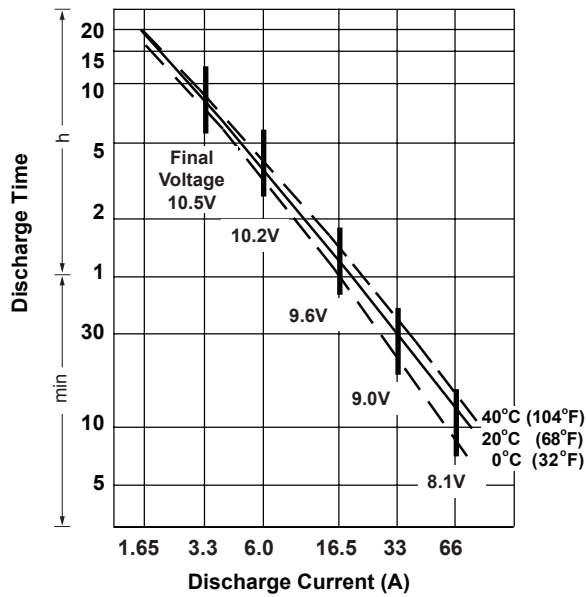

**Life Characteristics in Stand-By Use**

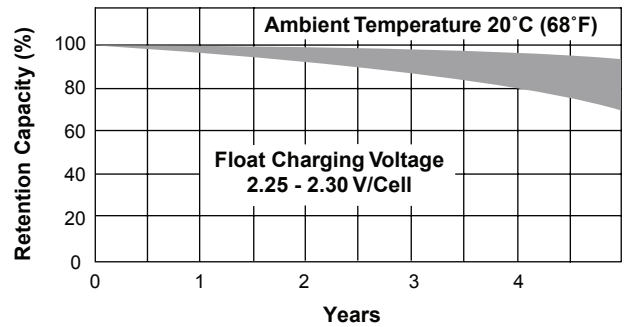

**Life Characteristics in Cyclic Use**

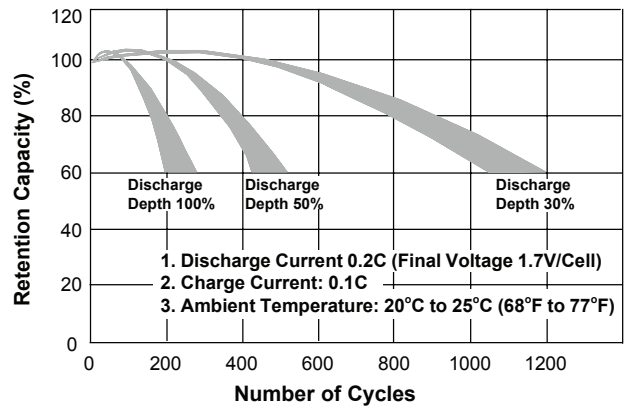

**Charging**

**Cycle Applications:** Limit initial current to 1.35A. Charge until battery voltage (under charge) reaches 7.20 to 7.35 volts at 68°F (20°C). Hold at 7.20 to 7.35 volts until current drops to under 45mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**"Float" or "Stand-By" Service:** Hold battery across constant voltage source of 6.75 to 6.90 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**

**DOMESTIC SALES**  
Tel: +1-619-661-2020  
Fax: +1-619-661-3650  
national-sales@power-sonic.com

**CUSTOMER SERVICE**  
Tel: +1-619-661-2030  
Fax: +1-619-661-3648  
customer-service@power-sonic.com

**TECHNICAL SUPPORT**  
Tel: +1-619-661-2020  
Fax: +1-619-661-3648  
support@power-sonic.com

**INTERNATIONAL SALES**  
Tel: +1-650-364-5001  
Fax: +1-650-366-3662  
international-sales@power-sonic.com