

## PSG-480 4 Volt 8.0 AH

### Rechargeable Sealed Lead Acid Battery



We've Got The Power.™

**This model has been discontinued. Specs are for reference only.**




### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845


### Terminals

(mm)

- F2 - Quick disconnect tabs, 0.250" x 0.032"
- Mate with AMP. INC FASTON "250" series



### Physical Dimensions: in (mm)

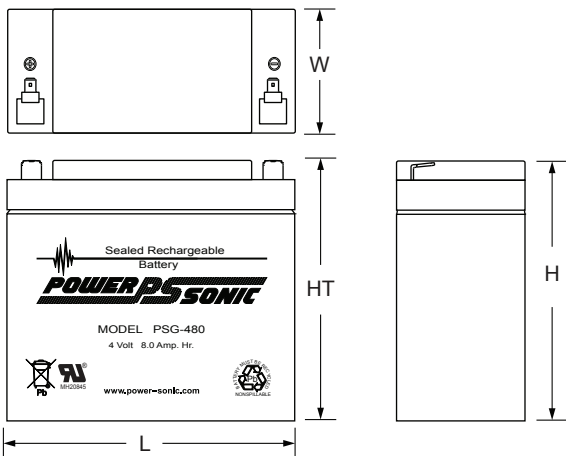

**L: 3.54 (90) W: 1.94 (49) H: 4.00 (102) HT: 400 (102)**

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Performance Specifications

**Nominal Voltage** .....4 volts (2 cells)

#### Nominal Capacity

20-hr. (400mA to 3.5 volts) .....	8.0 AH
10-hr. (740mA to 3.50 volts) .....	7.4 AH
5-hr. (1.36A to 3.40 volts) .....	6.8 AH
1-hr. (4.9A to 3.00 volts) .....	4.9 AH

**Approximate Weight** ..... 2.09 lbs. (0.95 kg)

**Energy Density (20-hr. rate)** ..... 1.16 W-h/in<sup>3</sup> (71.09 W-h/l)

**Specific Energy (20-hr. rate)** ..... 15.31 W-h/lb (33.75 W-h/kg)

**Internal Resistance (approx.)** ..... 13 milliohms

**Max Discharge Current (7 Min.)** ..... 24 amperes

**Max Short-Duration Discharge Current (10 Sec.)**..... 80.0 amperes

#### Shelf Life (% of nominal capacity at 68 °F (20 °C))

1 Month .....	97%
3 Months.....	91%
6 Months .....	83%


#### Operating Temperature Range

Charge .....	-4 °F (-20 °C) to 122 °F (50 °C)
Discharge.....	-40 °F (-40 °C) to 140 °F (60 °C)


**Case** ..... ABS Plastic

**Power-Sonic Chargers** ..... n/a


**Shelf Life & Storage**

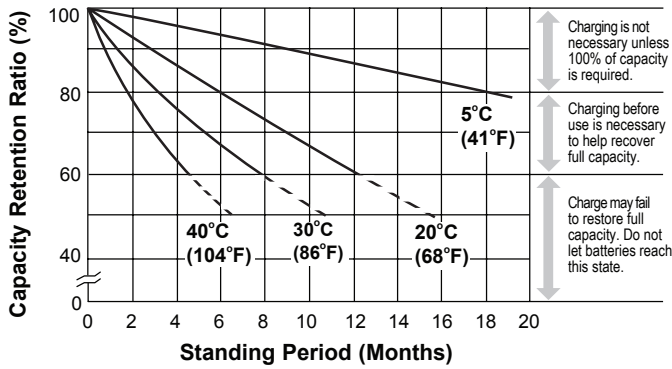


**Discharge Characteristics**

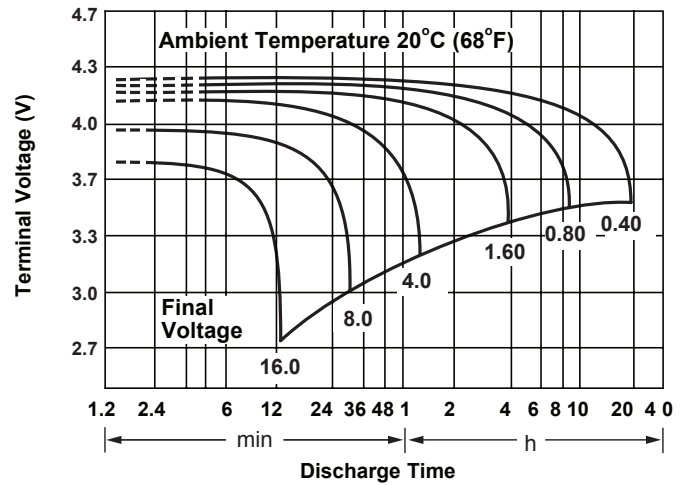


**Discharge Time vs. Discharge Current**

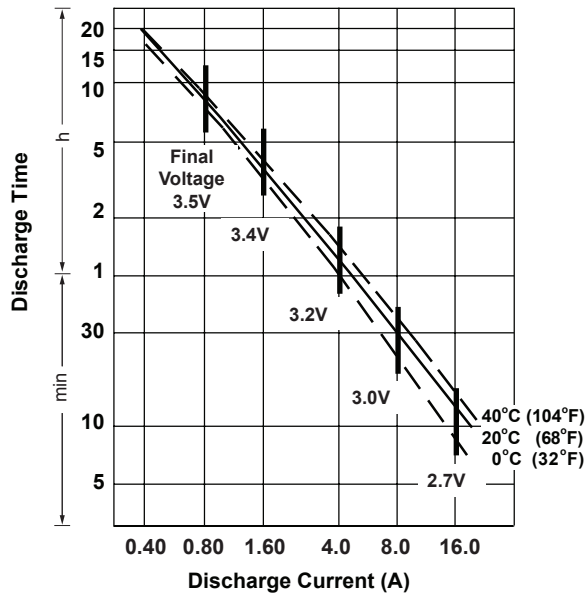

**Life Characteristics in Stand-By Use**

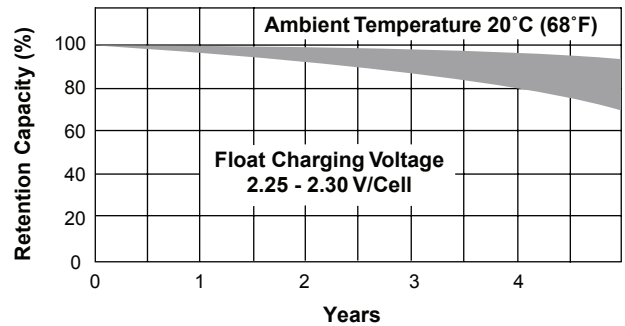

**Life Characteristics in Cyclic Use**

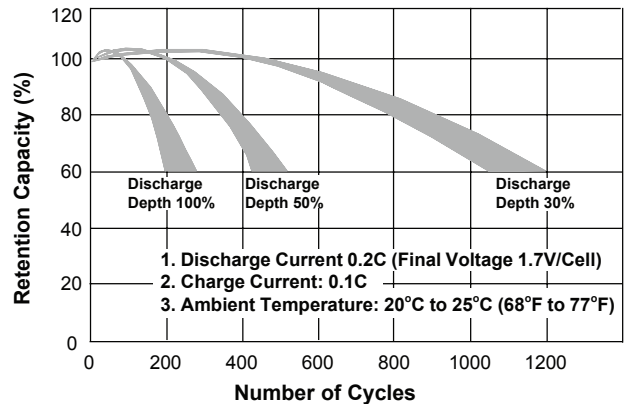

**Charging**

**Cycle Applications:** Limit initial current to 2.4A. Charge until battery voltage (under charge) reaches 4.8 to 5.0 volts at 68°F (20°C). Hold at 4.8 to 5.0 volts until current drops to under 80mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**"Float" or "Stand-By" Service:** Hold battery across constant voltage source of 4.5 to 4.6 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**

**DOMESTIC SALES**

Tel: +1-619-661-2020  
Fax: +1-619-661-3650  
national-sales@power-sonic.com

**CUSTOMER SERVICE**

Tel: +1-619-661-2030  
Fax: +1-619-661-3648  
customer-service@power-sonic.com

**TECHNICAL SUPPORT**

Tel: +1-619-661-2020  
Fax: +1-619-661-3648  
support@power-sonic.com

**INTERNATIONAL SALES**

Tel: +1-650-364-5001  
Fax: +1-650-366-3662  
international-sales@power-sonic.com